



**COMPUCALLER III
INSTRUCTION MANUAL**

BLANK

Congratulations, you have purchased the most technically advanced electronic wildlife calling system in the world! The sound quality, volume, remote control capabilities and size put COMPUCALLER III in a league of its own. While COMPUCALLER III IS NOT AN ANVIL, it is more than rugged enough to handle temperatures from below zero to over 100 degrees and the standard abuse of day to day calling. I guarantee that any hunter will call more predators with the COMPUCALLER III than any other method presently known.

Inside the box you will find:



- (1) Compucaller III base unit
- (2) Hand-held remote control
- (3) Camouflage carrying bag
- (4) 110v AC wall charger
- (5) 12v DC cigarette lighter charger

Before your first use, you need to charge the base unit. To do this, plug your wall charger in the wall and plug the other end in the jack marked "CHARGER". Your indicator light will blink red when rapidly charging and will stay red when trickle charging. Let the unit charge for 24 hours for the initial charge. After the initial charge, the normal recharge time is overnight. NOTE: The cigarette lighter charger should only be used for short periods (30 mins-2 hrs) of time.

Operation

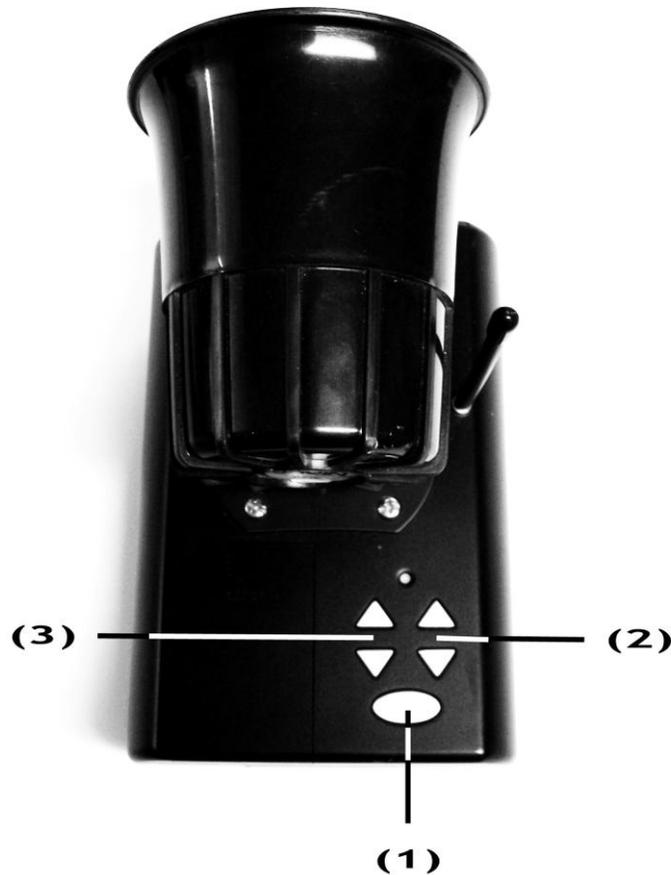



fig. 2-1

- (1) Play / Stop button
- (2) Volume up / down buttons
- (3) Sound select buttons
- (4) Stationary antenna

- (1) To operate the caller, press and hold the start/stop button on the base unit for 5-7 seconds. The green light will flash quickly indicating that the caller is initializing.
- (2) Next, turn on the remote control by pressing and holding the start/stop

button on the remote for 5-7 seconds. The remote will start vibrating indicating that it is receiving information from the base unit, and the green light on the base will flash quickly for a few seconds.

- (3) When the green light is steady green, or when the remote control stops vibrating, the unit is ready to receive commands.
- (4) The display on the remote shows the following:

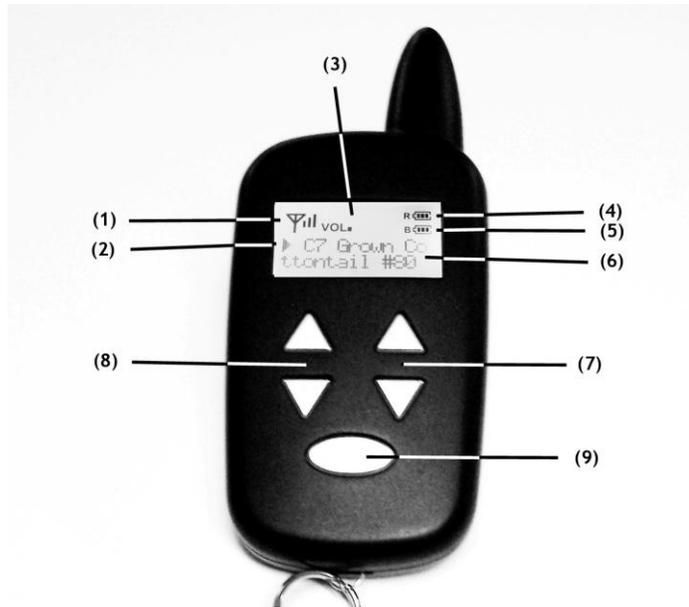

- (1) Signal strength indicator
- (2) Playing / Stopped indicator
- (3) Volume Level indicator
- (4) Remote control battery level indicator
- (5) Base unit battery level indicator
- (6) Name of selected sound
- (7) Volume up/down buttons
- (8) Sound selection up/down buttons
- (9) Play/stop button

Operating the unit from the base is as follows:

Press the start / stop button to start playing a sound. Pressing the V+ button increases the volume, pressing the V- button reduces the volume. Pressing the

S+ button switches the caller to next sound, pressing the S- button switches the caller to the previous sound. You can change the volume and select the sounds while the caller is paused. The green light on the caller flashes to confirm the commands.

Operation via the remote is similar to the base except to change the sounds, press the S+ or S- to scroll through the sounds. When you find the sound you want to play, press the start / stop button to select the sound and start playing it. If the caller is already playing, the selected sound will start playing immediately.

Note: should you get the error message “base not found”, you may need to re-code the remote to the base by following these steps:

Make sure both the base and remote are both off. First, turn on the remote. The “base not found” message may appear. Then press and hold the S+ button down until “coding” appears in the display. Then turn on the base unit. When the green lights starts flashing, press and hold the S+ button down on the base until the remote begins vibrating and receiving commands from the base. Your remote is now coded for your base.



Changing Soundcards

To install additional soundcards, first power the unit off, and simply line up the card in the slot (card will only fit one direction) and push the card into the slot firmly until it stops. The unit will recognize the new card when it is powered back on. To remove a soundcard, first power the unit off, and firmly grip the soundcard with the thumb and forefinger and pull straight up. A tweezer is

enclosed for Individuals with larger hands. Repeat the process for any other sounds you wish to replace.

Troubleshooting

Base unit will not power on.	Start / stop button not being held down long enough.	Hold down start / stop for at least 5-7 seconds
	Speaker not making contact	Check speaker jack
	Battery dead – (dim or no green light)	Recharge battery or install disposable batteries
Remote will not power on	Start / stop button not being held down long enough.	Hold down start / stop for at least 5-7 seconds
Remote does not function or range is short	Remote batteries are loose, weak or dead	Check battery holder. Install new battery
“base not found” is displayed	Remote is not coded to the base	Refer to coding instructions earlier in manual

Burnham Brothers
 P.O. Box 427
 Menard, TX 76859
 325-396-4572
info@burnhambrothers.com